


FUJIKURA FIT Web PLUS


Data

Surface Colour			Blue
Type			Compressible
Thickness	mm		1.72
Number of ply			3
Thickness tolerance	mm		0.02
Hardness	° Shore A		80
Surface Roughness, Rz	µm		6
Compressibility at 100 N/cm ²	mm		0.0
Paper Release (max.=100) (*)	without ink		100
	with ink		90
Durability test (*)	Gauge loss	%	1.5
	Loss of Compress.	%	26
Cylinder Fitness at	4 N/mm	mm	0.10
	5 N/mm	mm	0.08
	6 N/mm	mm	0.03
Flexibility (*)		degree	38
Tensile Strength		N/mm	90
2 % Modulus		N/mm	53
Elongation at Break		%	3.3
UV Ink Swell test, Thickness Increase in 24 h			0.04
Stickiness		N/25mm	-


Cross Section

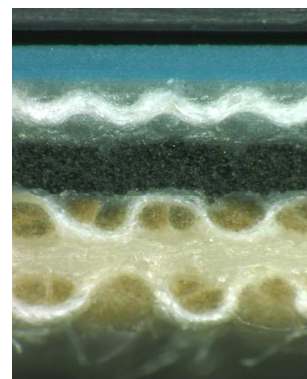


Surface Profile

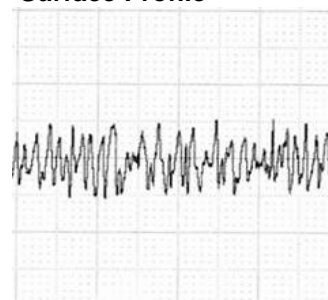

Compressibility Curve

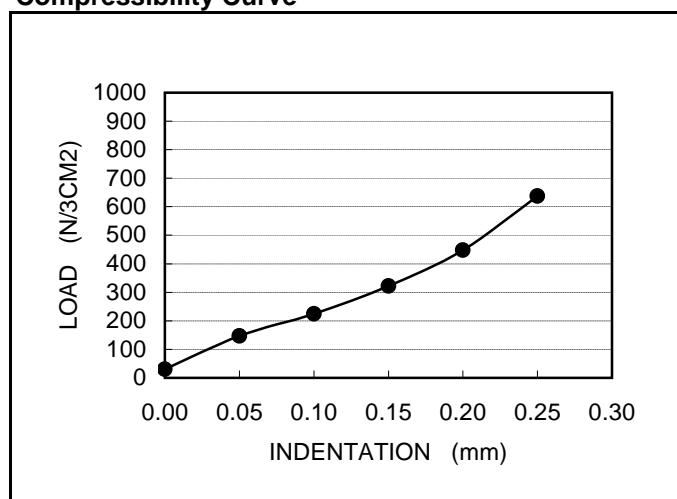

Relation Feeding / Indentation

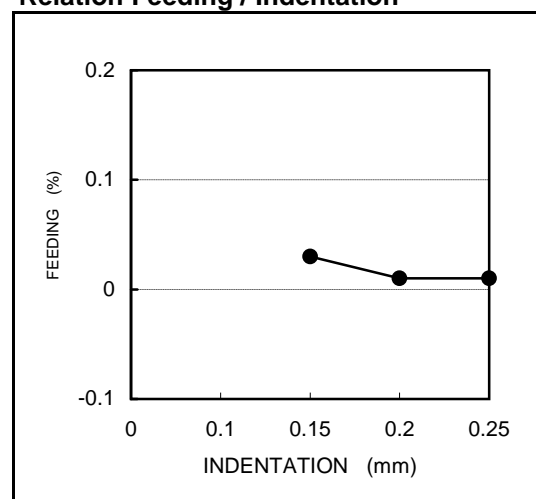

Indentation / mm	0.00	0.05	0.10	0.15	0.20	0.25	0.30
Compressibility N/3cm ²	30	147	224	322	448	637	-
Feeding	-	-	-	-	-	-	-

Application

Features

(*) Fujikura Testing Method

Fujikura Rubber Ltd.

