



vulcan® Folio


Key performance

- Excellent half tone reproduction
- Reduced gauge loss
- Implements all benefits of the **Dynatech System:**
 - Better vibration absorption
 - Less gears streaking marks
 - Higher paper smash resistance
 - Blanket consistency
 - Excellent reboundability

MAIN APPLICATION

Commercial Sheetfed

Vulcan Folio is available in 3-ply, (1,96 mm) thickness.

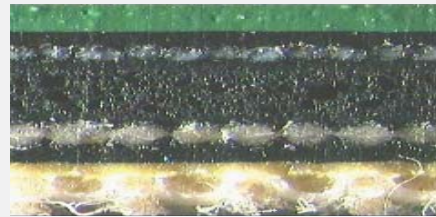

Vulcan Folio

✓ The product at a glance

INK COMPATIBILITY	Hybrid
PRINTING SURFACE COLOUR	Dark Green
THICKNESS (mm)	1,96
AVERAGE LOAD VALUE N/cm2 @ 0,23 mm Indentation	250
SURFACE ROUGHNESS (Ra micron)	0,6
ELONGATION (%)	<0,9
TENSILE STRENGTHS (N/mm)	>60
WATER & SOLVENT PROTECTION	Yes
NEW TECHNOLOGY	Dynatech
ADDITIONAL INFORMATION	
TOP FACE COMPOUND	The EPDM top face for UV inks is available (Folio UV)

**FOR ANY FURTHER DETAILS AND FOR A QUOTATION
PLEASE REFER TO YOUR SALES MANAGER
OR EMAIL US AT: printing@trelleborg.com**